



Fiberglass Water Slide Model 2200

Specifications

Description: Single 32" I.D. closed flume & 36" I.D. open flume fiberglass water slide.

Centerline Run: 25' 1"


Entry Height: 6' 8"

Platform Size: 4' x 8'

Space Requirement: 25' 7-1/4" x 13' 9-3/16"

Features

- 32" inside diameter closed flume fiberglass.
- 36" inside diameter closed flume fiberglass.
- Flume: ultra violet stabilized gelcoat.
- Platform: Aqua-Plast coated textured aluminum surface.
- Stairs: 8" rise, 8" tread, 24" wide; Aqua-Plast coated textured aluminum surface.
- Stainless steel base plates, hardware and anchor bolts.
- Designed with flexibility to allow for sloping pool decks.
- 20 to 40 gpm required.
- Splash down dimension 12' 8" x 20' 0"
- Minimum water depth: 3' 0"
- USA Made

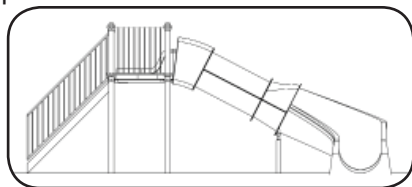

Options

- Deluxe Series: Stainless steel polyester powder coated except tower and flume posts which are mild steel with chemical resistant Aqua-Kote undercoating and polyester powder coat topcoat. Note: Platform and stair treads are textured Aqua-Plast coated aluminum.
- North Star Series: Mild steel with chemical resistant Aqua-Kote undercoating and polyester powder coat topcoat. Note: Platform and stair treads are textured Aqua-Plast coated aluminum.
- Hot dipped galvanized available.
- Stairs: Aqua-Plast coated textured aluminum surface; closed risers (a) 7" rise, 11" tread, 36" wide (b) 48" width; (c) Inner handrails (if applicable)
- Gates: Locking gate to flume entrance.
- Flag and banner holders.
- Tower Roof: (a) Steel; (b) Wood; (c) Fabric; (d) Tongue & groove decking with wood or steel roofs.
- Water pumps & covers
- Perimeter Fencing
- Factory installation or on-site technical assistance.

Natural Structures

PO Box 270, Baker City, OR 97814

(541) 523-0224 (800) 252-8475 Fax (541) 523-0231

www.naturalstructures.com - info@naturalstructures.com